


# 13-Core Cable

- **Materials:** Conductor: CU EPT1 EN 13602, bare  
Insulation material: Plasticized PVC  
Jacket material: Plasticized PVC
- **Voltage level:** 60V
- **Temperature range:** -40°C to +105°C
- **Features:** Composition (mm<sup>2</sup>): 13x1.50  
Cable acc. to EU End-of-life Directive 2000/53/EG  
Cable acc. to REACH specification  
No content of restricted substances acc. to VDA 232-101

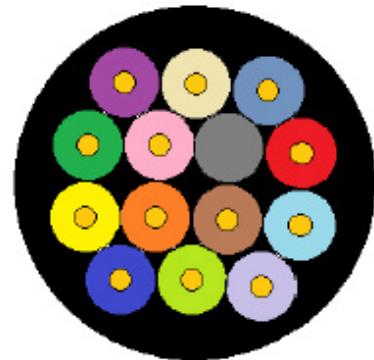

Product SKU	Conductor				Geometry		Cable		
	Geometry			Resistance	Wall thickness min. [mm]	Diameter [mm]	Geometry		
	Cross-section (mm <sup>2</sup> )	Construction Nx[mm]	Diameter max. [mm]				Bare max. [mΩ/m]	Wall thickness min. [mm]	Diameter [mm]
<b>AC13</b>	1.50	30x0.26	1.7	12.7	0.24	2.4-0.2	0.76	13.0-1.0	250