


3-Core Cable



• Materials:	Conductor: Copper Insulation material: PVC
• Max. Voltage	60V
• Temperature range:	-15°C to +70°C
• Features:	<ul style="list-style-type: none"> • Compliance with BS EN60228:2005 and ISO 6722:2006 (Class B) • Cable manufactured in accordance with BS 6862 Part 1:1971 where applicable • Suitable for most 12v and 24v Systems • PVC insulation resistant to petrol/diesel, oil and diluted acids • Plain copper stranded conductors - PVC sheathed

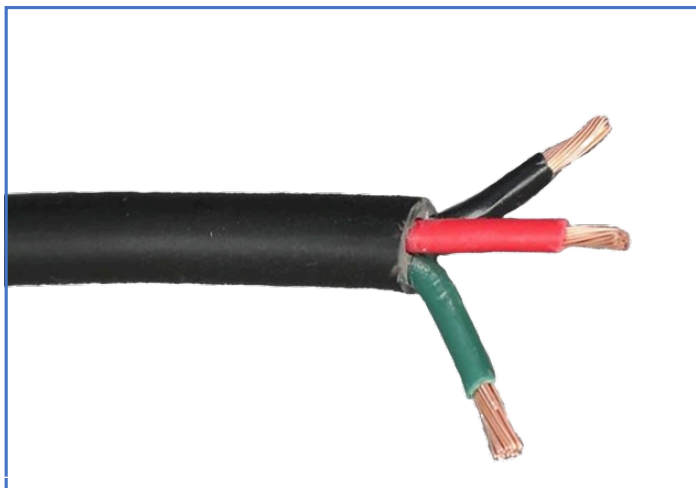

Product SKU	Conductor				Isolation Thickness		Single core diameter		
	Number and diameter of strands	Copper max. resistance at 20°C Ω/km	Diameter max. [mm]	Lay lenght [mm]	Minimum [mm]	Nominal [mm]	Minimal [mm]	Nominal [mm]	Maximum (mm)
AC30	14x0.293	18.84	1.30	50	0.44	0.60	2.25	2.45	2.70