
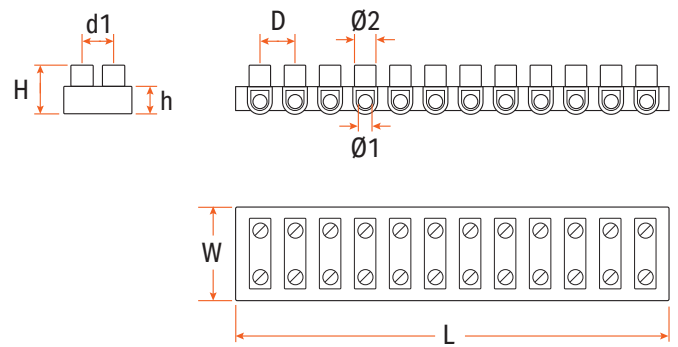


Cable Termination

Electrical Connector Strips

- **Materials:** Way: Polyethylene
Connector Strip: Brass inserts
Captive screws: galvanised steel
- **Operating temperature:** -15°C to +80°C.

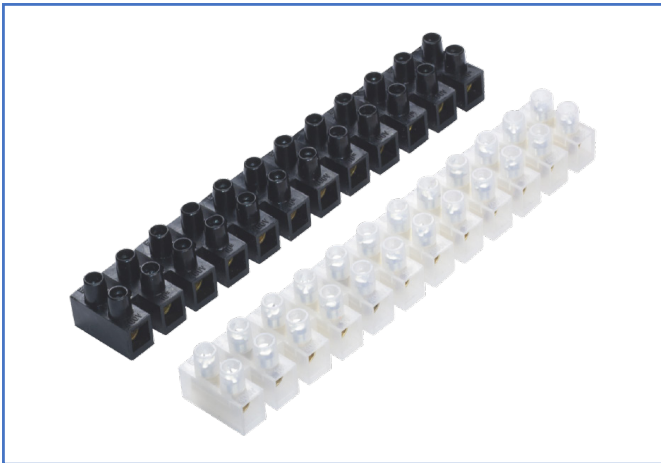

Item No.	Colour	Cross Section	Rated Current (A)	Rated Voltage (V)	Dimensions (mm)							
					Ø1	Ø2	D	d1	W	L	H	h
CB3-W	Natural	4	3 - 24	380	2.8	2.3	7.8	6	16.8	93	13.6	7.6
CB5-W	Natural	6	5 - 32	380	3.3	2.6	10.0	8	18.8	115	15.0	8.8
CB10-W	Natural	10	10 - 57	400	4.3	2.8	11.0	9	20.7	129	16.2	9.6
CB15-W	Natural	12	15 - 61	401	4.5	2.8	12.0	10	22.5	137	18.8	10.2
CB30-W	Natural	16	30 - 76	402	5.5	3.0	14.0	11	25.5	165	19.8	11.2
CB60-W	Natural	25	60 - 101	403	6.5	3.8	16.5	13	31.2	187	25.5	14.8
CB3-B	Black	4	3 - 24	380	2.8	2.3	7.8	6	16.8	93	13.6	7.6
CB5-B	Black	6	5 - 32	380	3.3	2.6	10.0	8	18.8	115	15.0	8.8
CB10-B	Black	10	10 - 57	400	4.3	2.8	11.0	9	20.7	129	16.2	9.6
CB15-B	Black	12	15 - 61	401	4.5	2.8	12.0	10	22.5	137	18.8	10.2
CB30-B	Black	16	30 - 76	402	5.5	3.0	14.0	11	25.5	165	19.8	11.2
CB60-B	Black	25	60 - 101	403	6.5	3.8	16.5	13	31.2	187	25.5	14.8