


# Electrical PVC Sleeving

2-6mm Diameter

Standard: UL 224



• <b>Operating Temperature:</b>	-20°C to +80°C
• <b>Material:</b>	PVC.
• <b>Features:</b>	Flexible. Self-extinguishing material (30 secs). Water, oil and fuel resistant.
• <b>Application:</b>	Used where wires and cables are required to have additional protection and insulation.

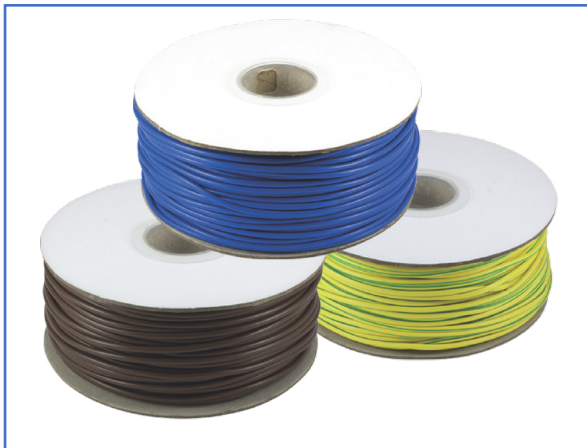

Item No.	Colour	Length (m)	Internal Diameter (mm)	Wall Thickness (mm)
VS202	Brown	100	2 (±0.15)	0.50 (±0.10)
VS302	Brown	100	3 (±0.15)	0.50 (±0.10)
VS402	Brown	100	4 (±0.15)	0.50 (±0.10)
VS502	Brown	100	5 (±0.15)	0.50 (±0.10)
VS602	Brown	100	6 (±0.15)	0.50 (±0.10)
VS201	Blue	100	2 (±0.15)	0.50 (±0.10)
VS301	Blue	100	3 (±0.15)	0.50 (±0.10)
VS401	Blue	100	4 (±0.15)	0.50 (±0.10)
VS501	Blue	100	5 (±0.15)	0.50 (±0.10)
VS601	Blue	100	6 (±0.15)	0.50 (±0.10)
VS200	Green Yellow	100	2 (±0.15)	0.50 (±0.10)
VS300	Green Yellow	100	3 (±0.15)	0.50 (±0.10)
VS400	Green Yellow	100	4 (±0.15)	0.50 (±0.10)
VS500	Green Yellow	100	5 (±0.15)	0.50 (±0.10)
VS600	Green Yellow	100	6 (±0.15)	0.50 (±0.10)