

Quick Disconnects

Female Spade Disconnects

Materials:

Conductor: Brass
Sleeve: Copper tubular
Insulation: Vinyl
Plating: Tin



Operating Temperature:

-10°C to +75°C.

Features:


Max. voltage rating: 300V.
Flared barrel for easy wire insertion.
Low insertion force and easy crimping whilst ensuring secure termination.




Material

- ① Brass
- ② Tin
- ③ Vinyl
- ④ Copper

Standard Internal Copper Sleeve

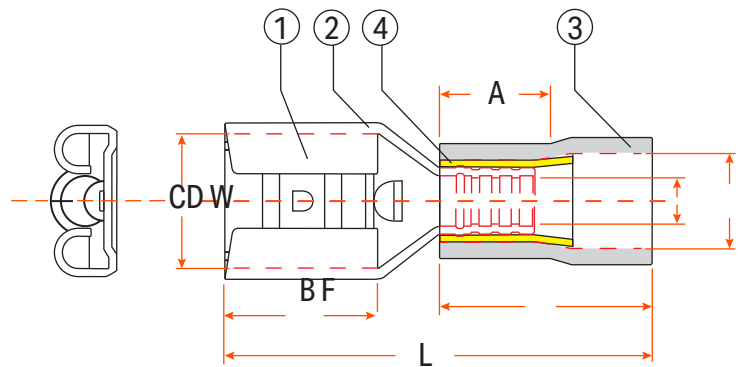

Long Internal Copper Sleeve

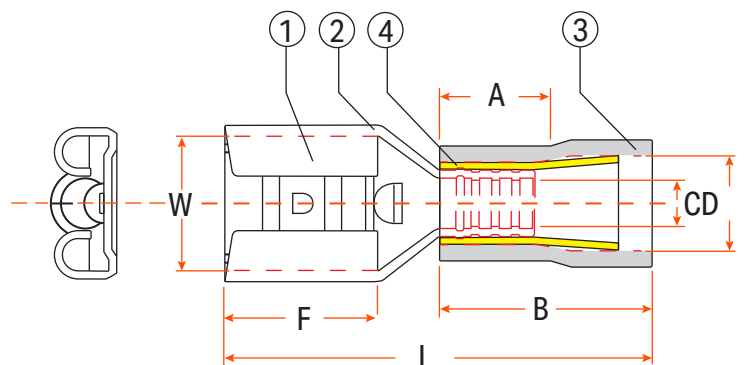

Max. current rating

Red	10A
Blue	15A
Yellow	24A

See product technical table on next page

Quick Disconnects

Female Spade Disconnects

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)							
			Tab Size	A	B	C	D	W	L	F
WT101	Red	0.5-1.5	0.5 x 2.80	5.2	10.5	1.7	3.8	3.2	18.8	6.4
WT101-L	Red	0.5-1.5	0.5 x 2.80	5.2	10.5	1.7	3.8	3.2	18.8	6.4
WT1	Red	0.5-1.5	0.8 x 2.80	5.2	10.5	1.7	3.8	3.2	18.8	6.4
WT1-L	Red	0.5-1.5	0.8 x 2.80	5.2	10.5	1.7	3.8	3.2	18.8	6.4
WT102	Red	0.5-1.5	0.5 x 4.75	5.2	10.5	1.7	3.8	5.0	19.0	6.4
WT102-L	Red	0.5-1.5	0.5 x 4.75	5.2	10.5	1.7	3.8	5.0	19.0	6.4
WT2	Red	0.5-1.5	0.8 x 4.75	5.2	10.5	1.7	3.8	5.0	19.0	6.4
WT2-L	Red	0.5-1.5	0.8 x 4.75	5.2	10.5	1.7	3.8	5.0	19.0	6.4
WT3	Red	0.5-1.5	0.8 x 6.35	5.2	10.5	1.7	3.8	6.6	20.8	7.2
WT3-L	Red	0.5-1.5	0.8 x 6.35	5.2	10.5	1.7	3.8	6.6	20.8	7.2
WT103	Blue	1.5-2.5	0.5 x 4.75	5.2	10.5	2.3	4.7	5.0	19.0	6.4
WT103-L	Blue	1.5-2.5	0.5 x 4.75	5.2	10.5	2.3	4.7	5.0	19.0	6.4
WT4	Blue	1.5-2.5	0.8 x 4.75	5.2	10.5	2.3	4.7	5.0	19.0	6.4
WT4-L	Blue	1.5-2.5	0.8 x 4.75	5.2	10.5	2.3	4.7	5.0	19.0	6.4
WT5	Blue	1.5-2.5	0.8 x 6.35	5.2	10.5	2.3	4.7	6.6	20.8	7.2
WT5-L	Blue	1.5-2.5	0.8 x 6.35	5.2	10.5	2.3	4.7	6.6	20.8	7.2
BFS83	Blue	1.5-2.5	0.8 x 8.00	5.2	10.5	2.3	4.7	8.2	24.5	10.2
WT6	Yellow	4.0-6.0	0.8 x 6.35	5.7	13.0	3.4	6.2	6.6	23.8	7.2
WT6-L	Yellow	4.0-6.0	0.8 x 6.35	5.7	13.0	3.4	6.2	6.6	23.8	7.2
WT7	Yellow	4.0-6.0	1.2 x 9.40	5.7	13.0	3.4	6.2	10.0	30.0	12.0
WT7-L	Yellow	4.0-6.0	1.2 x 9.40	5.7	13.0	3.4	6.2	10.0	30.0	12.0

L suffix on Item No. denotes long internal copper sleeve.