

Terminals

Fork Terminals

• Materials:

Conductor: Copper
Insulation: Vinyl
Plating: Tin

• Operating Temperature:

-10°C to +75°C.


• Features:

Max. voltage rating: 600V.
Flared barrel for easy wire insertion.
Low insertion force and easy crimping whilst ensuring secure termination.



Material

- ① Copper
- ② Tin
- ③ Vinyl

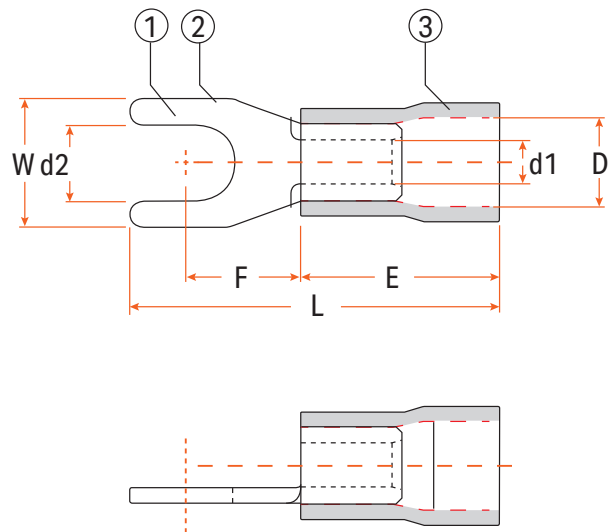

Max. current rating

Red	19A
Blue	27A
Yellow	48A

See product technical table on next page

Terminals

Fork Terminals

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)						
			D	d1	d2	W	L	E	F
WT23A	Red	0.5-1.5	4.3	1.7	3.3	5.7	21.0	10.0	6.5
WT24	Red	0.5-1.5	4.3	1.7	3.8	5.7	21.0	10.0	6.5
WT25	Red	0.5-1.5	4.3	1.7	4.4	6.4	21.0	10.0	6.5
WT26	Red	0.5-1.5	4.3	1.7	5.4	8.1	21.0	10.0	6.5
WT79	Red	1.5-2.5	4.3	1.7	6.6	9.5	21.0	10.0	6.5
WT26A	Blue	1.5-2.5	4.8	2.3	3.3	5.7	21.0	10.0	6.5
WT27	Blue	1.5-2.5	4.8	2.3	3.8	5.7	21.0	10.0	6.5
WT28	Blue	1.5-2.5	4.8	2.3	4.4	6.4	21.0	10.0	6.5
WT29	Blue	1.5-2.5	4.8	2.3	5.4	8.1	21.0	10.0	6.5
WT30	Blue	1.5-2.5	4.8	2.3	6.6	9.3	21.0	10.0	6.5
WT31	Yellow	4.0-6.0	6.7	3.4	3.8	8.3	25.5	13.0	7.0
WT32	Yellow	4.0-6.0	6.7	3.4	4.4	8.3	25.5	13.0	7.0
WT33	Yellow	4.0-6.0	6.7	3.4	5.4	9.0	25.5	13.0	7.0
WT34	Yellow	4.0-6.0	6.7	3.4	6.6	9.0	25.5	13.0	7.0
WT118	Yellow	4.0-6.0	6.7	3.4	8.5	14.0	30.5	13.0	11.5