

## **Gaffer / Duct Tape**

Polycloth Adhesive Tape

## • Material:


Polycloth.

Adhesive coated with vacuum hotmelt (synthetic rubber).



• Features:

- Ideal for fixing, binding and repairs.
- Water resistant, highly adhesive and leaves no residue.
- Suitable for interior and exterior use.

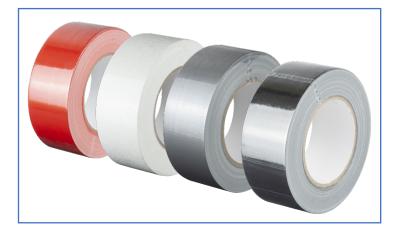

Technical Data				
Property	Value			
Total Thickness	0.18mm (±0.01)			
Elongation	10-20%			
Adhesive	Synethtic rubber			
Tensile Strength	> 60 N/cm			
Adhesive to Steel	> 6 N/cm			
Roll Back Tack	> 6 (ball no.)			
Temperature Rating	-15°C to +70°C			

Item No.	Colour	W (mm)	L (m)	Thickness (mm)
Т5-В	Black	48	50	0.18
T5-S	Silver	48	50	0.18
T5-W	White	48	50	0.18
T5-R	Red	48	50	0.18
Т36-В	Black	75	50	0.18
T36-S	Silver	75	50	0.18
T36-W	White	75	50	0.18
T42-B	Black	100	50	0.18
T42-S	Silver	100	50	0.18
T42-W	White	100	50	0.18

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application.

- The quoted values are average and should not be taken as maximum or minimum values for specific purposes.
- Beal UK cannot be held responsible for product failure unless full testing has been carried out.

The user has to decide on the tapes suitability for their own applications.