


Heat Shrink Terminals

Butt Connector Terminals

- Materials:** Conductor: Copper.
Insulation: Polyethylene.
Plating: Tin.
- Shrinkable Temperature:** +125°C to +180°C.
- Operating Temperature:** -45°C to 125°C.
- Features:** Lined with hot melt adhesive.
Voltage rating: 600V max.
Low insertion force and easy crimping whilst ensuring secure termination.

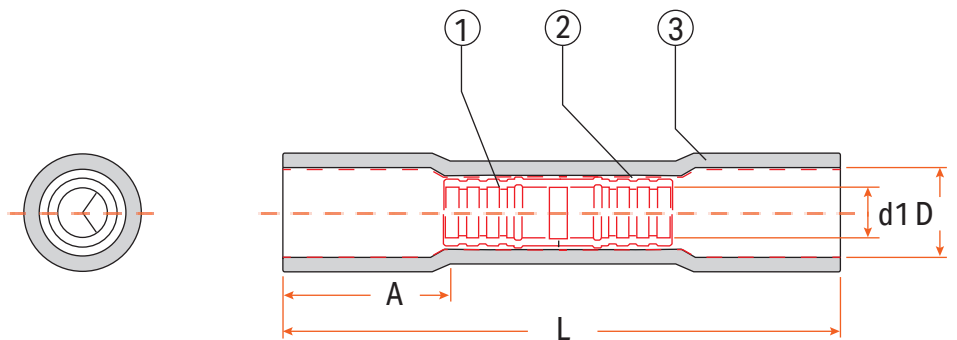

Material

- ① Copper
- ② Tin
- ③ Polyethylene

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)			
			A	D	d1	L
HWT15	Red	0.5-1.5	10.5	4.5	1.7	36.0
HWT16	Blue	1.5-2.5	10.5	5.5	2.3	36.0
HWT17	Yellow	4.0-6.0	13.8	6.5	3.4	41.0