

Heat Shrink Terminals

Female Spade Fully Insulated Terminals

Materials:

Conductor: Brass.
Sleeve: Copper tubular.
Insulation: Polyethylene.
Plating: Tin.



Shrinkable Temperature:


+125°C to +180°C.

Operating Temperature:

-45°C to +125°C.

Features:

Lined with hot melt adhesive.
Voltage rating: 600V max.
Low insertion force and easy crimping whilst ensuring secure termination.

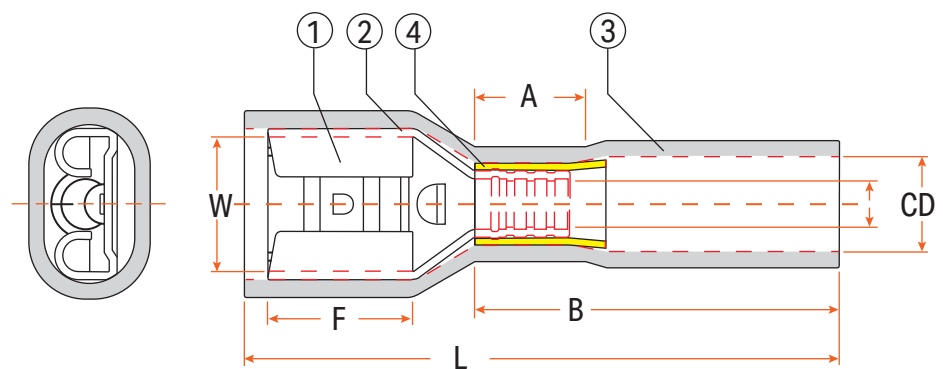

Material

- ① Brass
- ② Tin
- ③ Polyethylene
- ④ Copper

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)					
			Tab Size	B	C	W	L	F
HWT10	Red	0.5-1.5	0.8 x 6.35	1.7	8.5	6.5	28.0	7.5
HWT12	Blue	1.5-2.5	0.8 x 6.35	2.3	8.5	6.5	28.0	7.5
HWT13	Yellow	4.0-6.0	0.8 x 6.35	3.4	8.5	6.5	28.0	7.5