

Heat Shrink Terminals

Female Spade Terminals

• **Materials:**

Conductor: Brass.
Sleeve: Copper tubular.
Insulation: Polyethylene.
Plating: Tin.



• **Shrinkable Temperature:**


+125°C to +180°C.

• **Operating Temperature:**

-45°C to +125°C.

• **Features:**

Lined with hot melt adhesive.
Voltage rating: 600V max.
Low insertion force and easy crimping whilst ensuring secure termination.

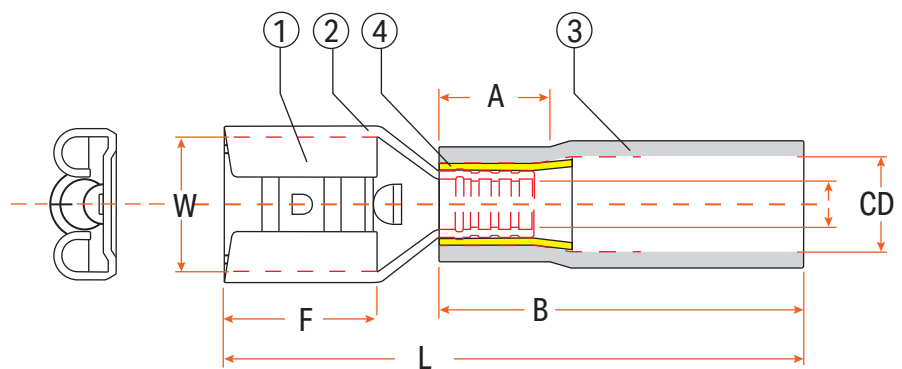

Material

- ① Brass
- ② Tin
- ③ Polyethylene
- ④ Copper

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)						
			Tab Size	B	C	D	W	L	F
HWT3	Red	0.5-1.5	0.8 x 6.35	25	1.7	4.5	6.6	33.0	7.2
HWT5	Blue	1.5-2.5	0.8 x 6.35	25	2.3	4.7	6.6	33.0	7.2
HWT6	Yellow	4.0-6.0	0.8 x 6.35	26	3.4	6.2	6.6	34.0	7.2