

Heat Shrink Terminals

Fork Terminals

• Materials:

Conductor: Copper.
Insulation: Polyethylene.
Plating: Tin.

• Shrinkable Temperature:

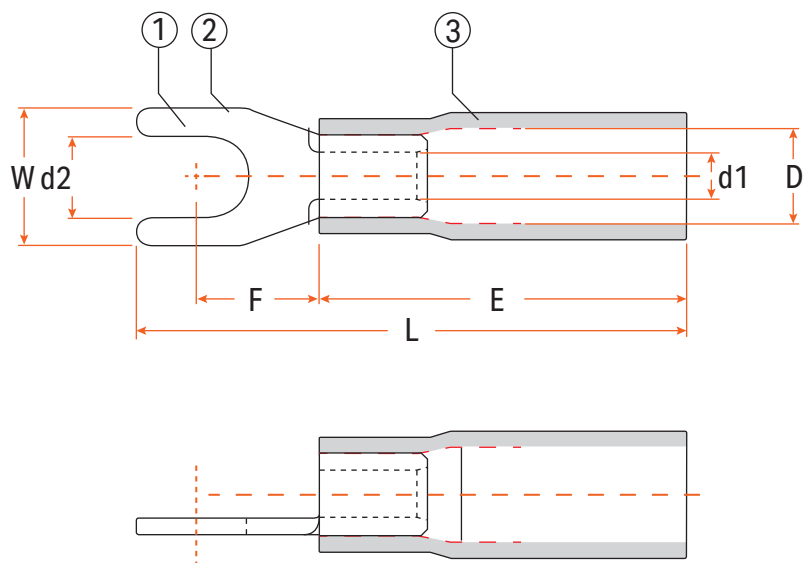
+125°C to +180°C.

• Operating Temperature:

-45°C to +125°C.

• Features:

Lined with hot melt adhesive.
Voltage rating: 600V max.
Low insertion force and easy crimping whilst ensuring secure termination.

**Material**

- ① Copper
- ② Tin
- ③ Polyethylene

See product technical
table on next page

Heat Shrink Terminals

Fork Terminals

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)					
			D	d1	d2	W	L	E
HWT25	Red	0.5-1.5	4.5	1.7	4.4	8.1	29.0	19.0
HWT26	Red	0.5-1.5	4.5	1.7	5.4	9.5	29.0	19.0
HWT28	Blue	1.5-2.5	5.5	2.3	4.4	8.1	29.0	19.0
HWT29	Blue	1.5-2.5	5.5	2.3	5.4	9.3	29.0	19.0
HWT32	Yellow	4.0-6.0	6.5	3.4	4.4	8.3	33.5	24.0
HWT33	Yellow	4.0-6.0	6.5	3.4	5.5	12.0	33.5	24.0
HWT34	Yellow	4.0-6.0	6.5	3.4	6.6	12.0	39.5	24.0