

# Heat Shrink Terminals

## Male Blade Terminals

**Materials:**

Conductor: Brass.  
Sleeve: Copper tubular.  
Insulation: Polyethylene.  
Plating: Tin.



**Shrinkable Temperature:**


+125°C to +180°C.

**Operating Temperature:**

-45°C to +125°C.

**Features:**

Lined with hot melt adhesive.  
Voltage rating: 600V max.  
Low insertion force and easy crimping whilst ensuring secure termination.

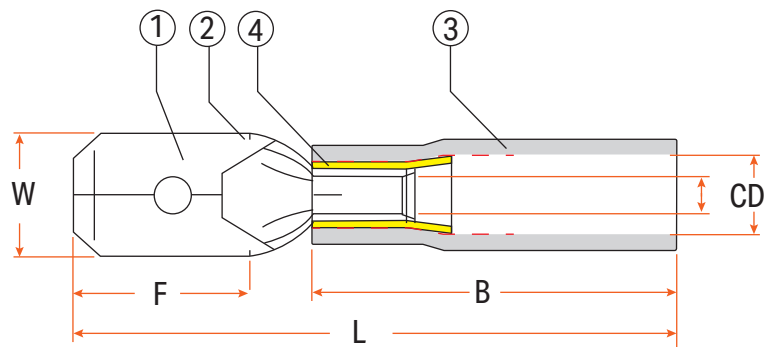

**Material**

- ① Brass
- ② Tin
- ③ Polyethylene
- ④ Copper

Item No.	Colour	Wire Range (mm <sup>2</sup> )	Dimensions (mm)						
			Tab Size	B	C	D	W	L	F
HWT58	Red	0.5-1.5	0.8 x 6.35	25	1.7	3.9	6.35	35.0	7.7
HWT59	Blue	1.5-2.5	0.8 x 6.35	25	2.3	4.7	6.35	35.0	7.7
HWT60	Yellow	4.0-6.0	0.8 x 6.35	26	3.4	6.3	6.35	36.0	7.7