

Heat Shrink Terminals

Male Bullet Terminals

Materials:

Conductor: Brass.
Sleeve: Copper tubular.
Insulation: Polyethylene.
Plating: Tin.



Shrinkable Temperature:


+125°C to +180°C.

Operating Temperature:

-45°C to +125°C.

Features:

Lined with hot melt adhesive.
Voltage rating: 600V max.
Low insertion force and easy crimping whilst ensuring secure termination.

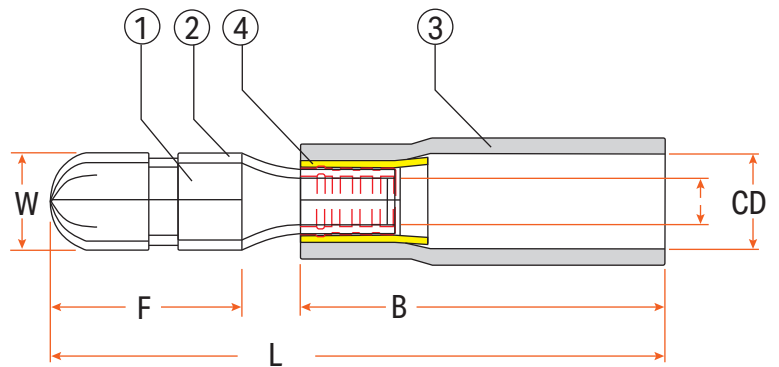

Material

- ① Brass
- ② Tin
- ③ Polyethylene
- ④ Copper

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)					
			B	C	D	W	L	F
HWT63	Red	0.5-1.5	25.0	1.7	3.9	4.0	36.0	8.5
HWT64	Blue	1.5-2.5	25.0	2.3	4.7	5.0	37.5	10.0
HWT65	Yellow	4.0-6.0	26.0	3.4	6.2	5.0	38.0	10.0