

# Terminals

## Lipped Blade Terminals

**• Materials:**

Conductor: Copper.  
Insulation: Vinyl.  
Plating: Tin.

**• Operating Temperature:**

-10°C to +75°C.


**• Features:**

Max. voltage rating: 600V.  
Flared barrel for easy wire insertion.  
Low insertion force and easy crimping whilst ensuring secure termination.



**Material**

- ① Copper
- ② Tin
- ③ Vinyl

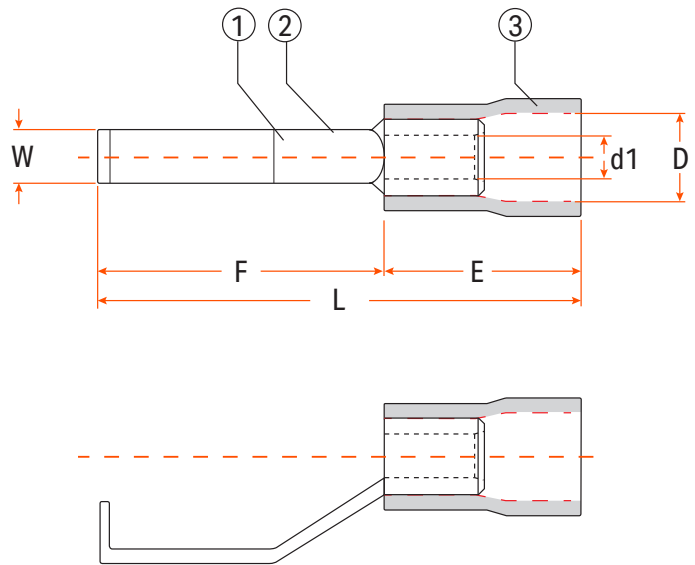

**Max. current rating**

Red	19A
Blue	27A
Yellow	48A

See product technical table on next page

# Terminals

## Lipped Blade Terminals

Item No.	Colour	Wire Range (mm <sup>2</sup> )	Dimensions (mm)						
			D	d1	W	L	E	F	T
WT111	Red	0.5-1.5	4.3	1.7	3.0	25.2	10.0	15.6	0.8
WT112	Red	0.5-1.5	4.3	1.7	4.6	25.2	10.0	15.6	0.8
WT113	Blue	1.5-2.5	4.8	2.3	3.0	25.2	10.0	15.6	0.8
WT114	Blue	1.5-2.5	4.8	2.3	4.6	25.2	10.0	15.6	0.8
WT115	Yellow	4.0-6.0	6.7	3.4	4.6	30.2	13.0	17.2	1.0