

Quick Disconnects

Male Quick Disconnects

Materials:

Conductor: Brass
Sleeve: Copper tubular
Insulation: Vinyl
Plating: Tin

Operating Temperature:

-10°C to +75°C.

Features:


Max. voltage rating: 300V.
Flared barrel for easy wire insertion.
Low insertion force and easy crimping whilst ensuring secure termination.




Material

- ① Brass
- ② Tin
- ③ Vinyl
- ④ Copper

Standard Internal Copper Sleeve

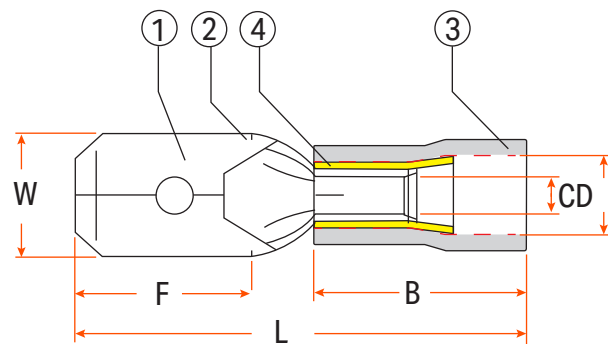

Long Internal Copper Sleeve

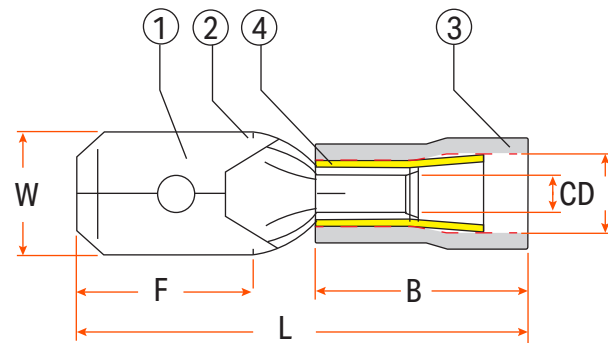

Max. current rating

Red	10A
Blue	15A
Yellow	24A

See product technical table on next page

Quick Disconnects

Male Quick Disconnects

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)						
			Tab Size	B	C	D	W	L	F
WT93	Red	0.5-1.5	0.5 x 2.80	10.5	1.7	3.9	2.80	18.7	6.5
WT94	Red	0.5-1.5	0.8 x 4.75	10.5	1.7	3.9	4.80	19.2	6.7
WT58	Red	0.5-1.5	0.8 x 6.35	10.5	1.7	3.9	6.35	20.8	6.7
WT58-L	Red	0.5-1.5	0.8 x 6.35	10.5	1.7	3.9	6.35	20.8	7.7
WT95	Blue	1.5-2.5	0.8 x 4.75	10.5	2.3	4.7	4.8	19.2	6.7
WT59	Blue	1.5-2.5	0.8 x 6.35	10.5	2.3	4.7	6.4	20.8	7.7
WT59-L	Blue	1.5-2.5	0.8 x 6.35	10.5	2.3	4.7	6.4	20.8	7.7
WT60	Yellow	4.0-6.0	0.8 x 6.35	13.0	3.4	6.3	6.35	24.0	7.7
WT60-L	Yellow	4.0-6.0	0.8 x 6.35	13.0	3.4	6.3	6.35	24.0	7.7

L suffix on Item No. denotes long internal copper sleeve.