


# Unleaded Fuel Hose

## General Purpose Insulating PVC Tape

• <b>Material:</b>	Tube: Black NBR Reinforcement: Polyester yarn Cover: Black, smooth, NBR/NBR PVC blended
• <b>Application:</b>	For conveyance of leaded or unleaded fuel. Also suitable for use with SCR (Selective Catalytic Reduction) additives.
• <b>Temperature range:</b>	-20°C to +70°C
• <b>Features:</b>	Max pressure: 20 BAR/300 PSI Safety factor: 3:1

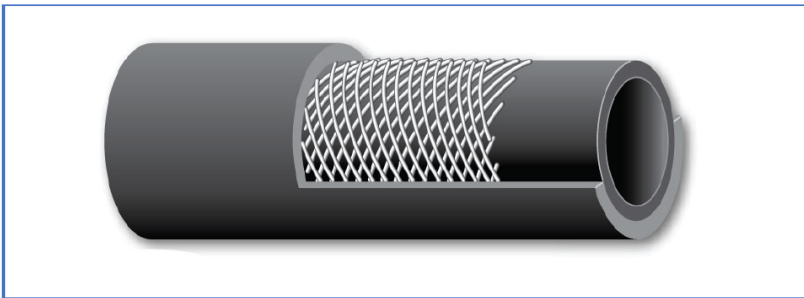

Item No.	Colour	Inch	Inner diameter (mm)	Outer diameter (mm)	Max bending radius (mm)
TH13	Black	1/4"	6	13	50
TH14	Black	5/16"	8	15	65
TH66	Black	3/16"	5	12	40
TH67	Black	3/8"	10	17	75

The above information is given only as a guide, the user should ensure that the performance of the product is sufficient for application. The quoted values are average and should not be taken as maximum or minimum values for specific purposes. Beal UK cannot be held responsible for product failure unless full testing has been carried out. The user has to decide on the tapes suitability for their own applications.