

Cable Termination

Heat Shrink Solder Butt Connectors

• **Materials:**

Insulation: Polyethylene.
Solder ring with flux.
Glue ring adhesive.



• **Shrinkable Temperature:**


+125°C to +180°C.

• **Operating Temperature:**

-45°C to +125°C.

• **Features:**

Voltage rating: 600V max.

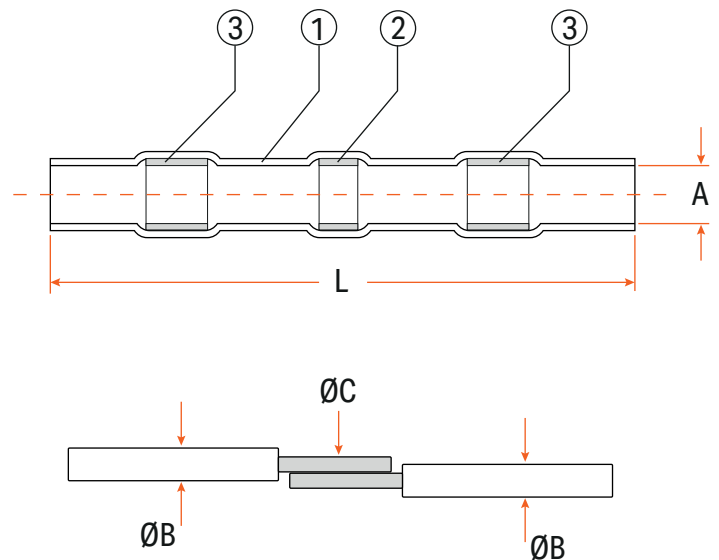

Material

- ① Polyethylene
- ② Solder ring with flux
- ③ Glue ring adhesive

Item No.	Colour	Wire Range (mm ²)	Dimensions (mm)				
			W	L	W	L	L
HSB10	White	0.25-0.34	1.7	0.4	1.7	0.8	26
HSB11	Red	0.5-1.5	2.7	1.3	2.7	1.2	40
HSB12	Blue	1.5-2.5	4.5	1.8	4.5	2.0	40
HSB13	Yellow	4.0-6.0	6.0	2.8	6.0	3.4	40