

Polyester Coated Stainless Steel Cable Ties

Ball Lock Type

- **Material:**


316L grade non-magnetic stainless steel.
Body of tie coated with Polyester.

- **Operating Temperature:**

-60°C to +150°C

- **Application:**

- Self-locking head design speeds installation and locks into place at any length.
- Provides a strong, durable method of cable bundling.

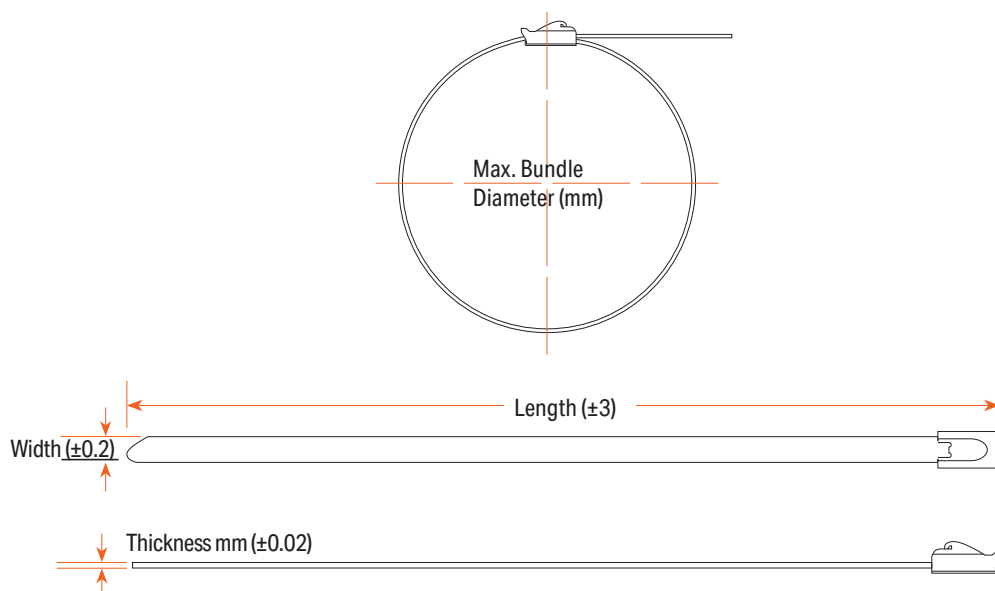

Polyester Coated Steel Stainless Cable Ties

Ball Lock Type

Item No.	Colour	Width W (mm)	Thickness (mm)	Length L (mm)	Max. Bundle Diameter (mm)	Min. Tensile Strength (kg)
SSCT1-C	Black/Stainless Steel Head	4.6	0.25	150	46	89
SSCT2-C	Black/Stainless Steel Head	4.6	0.25	200	62	89
SSCT18-C	Black/Stainless Steel Head	4.6	0.25	260	75	89
SSCT6-C	Black/Stainless Steel Head	4.6	0.25	300	94	89
SSCT3-C	Black/Stainless Steel Head	4.6	0.25	360	113	89
SSCT4-C	Black/Stainless Steel Head	4.6	0.25	520	164	89
SSCT15-C	Black/Stainless Steel Head	4.6	0.25	620	190	89
SSCT13-C	Black/Stainless Steel Head	4.6	0.25	840	265	89
SSCT16-C	Black/Stainless Steel Head	4.6	0.25	1000	311	89
SSCT14-C	Black/Stainless Steel Head	4.6	0.25	1200	355	89
SSCT17-C	Black/Stainless Steel Head	7.9	0.25	150	46	160
SSCT8-C	Black/Stainless Steel Head	7.9	0.25	200	62	160
SSCT9-C	Black/Stainless Steel Head	7.9	0.25	300	94	160
SSCT5-C	Black/Stainless Steel Head	7.9	0.25	360	113	160
SSCT7-C	Black/Stainless Steel Head	7.9	0.25	520	164	160
SSCT10-C	Black/Stainless Steel Head	7.9	0.25	620	190	160
SSCT11-C	Black/Stainless Steel Head	7.9	0.25	840	265	160
SSCT12-C	Black/Stainless Steel Head	7.9	0.25	1000	311	160